

Distributed Structural Stabilization and Tracking for Formations of Dynamic Multi-Agents

Reza Olfati-Saber Richard M. Murray
 Control and Dynamical Systems
 California Institute of Technology
 Pasadena, CA 91125
 e-mail: {olfati,murray}@cds.caltech.edu

Abstract

In this paper, we provide a theoretical framework that consists of graph theoretical and Lyapunov-based approaches to stability analysis and distributed control of multi-agent formations. This framework relies on the notion of graph rigidity as a means of identifying the shape variables of a formation. Using this approach, we can formally define formations of multiple vehicles and three types of stabilization/tracking problems for dynamic multi-agent systems. We show how these three problems can be addressed mutually independent of each other for a formation of two agents. Then, we introduce a procedure called dynamic node augmentation that allows construction of a larger formation with more agents that can be rendered structurally stable in a distributed manner from some initial formation that is structurally stable. We provide two examples of formations that can be controlled using this approach, namely, the V-formation and the diamond formation.

1 Introduction

Formation stabilization/tracking for systems of multiple vehicles/agents are of primary interest in both military and industrial applications. Multi-agent systems arise in broad areas including formation flight of unmanned air vehicles (UAVs), coordination of clusters of satellites, automated highway systems, flocking/schooling in nature [1], coordination of underactuated Marine vehicles in search and rescue operations, and molecular conformation problems [2].

Some of the applications of interest to us are performing low-altitude maneuvers by a group of UAVs that involves avoidance of obstacles and (possibly) adversarial vehicles. In its simplest form, the task of obstacle avoidance by a group of vehicles requires performing split/rejoin maneuvers. In addition, due to the environmental restrictions, the information flow [3] and/or formation of a group of vehicles [4] need to change. This set of changes in the operational modes of a group of

autonomous vehicles is schematically shown in Fig. 1. In this figure, each discrete-mode of operation is a *formation graph* that is defined in [4] based on the notion of *graph rigidity* [5], [6], [7], [8], [9], [10]. A crucial element in performing the majority of these maneuvers is the *capability to solve stabilization/tracking problems for formations of multiple dynamic agents*.

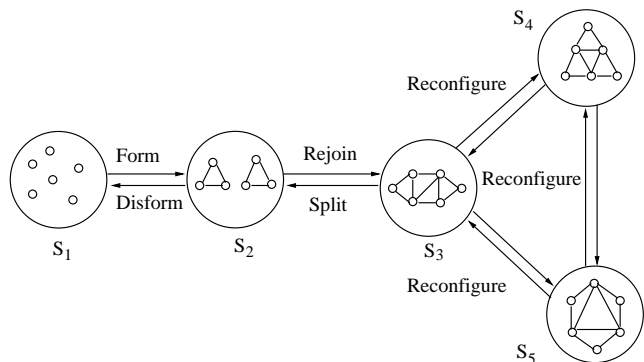


Figure 1: A Hybrid System representing the switching between multiple formations via performing a set of maneuvers.

The problem of *distributed structural stabilization of formations* of multiple vehicles using bounded control inputs is addressed in [11]. This is done by construction of a structural potential function from a minimally rigid graph [4] that has a unique global minimum (up to rotation, translation, and folding [11]). In [1], a different type of potential function is used. In the context of that work, a unique global minimum of the overall potential function is not desirable. Furthermore, according to [1] construction of a global potential function with a unique minimum requires adding several virtual vehicles.

In both gradient flow based methods relying on construction of potential functions suggested in [1], [11], the information flow in the network of multiple agents is undirected and every two agents that are connected through a link either communicate with each other, or sense relative coordinates w.r.t. each other. This is in sharp contrast to the work in [3] which readily

allows directed information flow. However, the mathematical framework in [3] does not apply to agents with nonlinear dynamics and/or performing operations like rotation of the attitude of a formation.

In summary, the main contribution of this work is to provide a means for performing stabilization/tracking in multi-agent systems in distributed and directed fashion that is capable of dealing with agents that have nonlinear dynamics and/or performing arbitrary rotations and translations. The key analytical tool is a separation principle that decouples structural stabilization from navigational tracking and the dynamic node augmentation procedure. This procedure allows construction of a larger formation with more agents that can be rendered structurally stable in a distributed manner from some initial formation that is structurally stable.

Here is an outline of the paper. In Section 2, we define formations of multiple dynamic agents. In Section 3, we give some background on graph rigidity and define minimally rigid graphs. In Section 4, structural stabilization and tracking for a formation of two agents is presented. In Section 5, we state our main result on dynamic node augmentation. In Section 6, the simulation results for stabilization to a diamond formation are presented. Finally, concluding remarks are made in Section 7.

2 Formations of Dynamic Multi-Agents

Consider a group of n agents ($n \geq 2$) each with the following dynamics

$$\begin{cases} \dot{q}_i &= p_i \\ \dot{p}_i &= u_i \end{cases} \quad (1)$$

where $q_i, p_i, u_i \in \mathbb{R}^m$ for all $i \in \mathcal{I} = \{1, \dots, n\}$. Therefore, each agent has a *linear dynamics*.

Remark 1. This assumption is made for the sake of presenting the main geometric and graph-theoretic ideas rather than getting involved in the technical details of dealing with nonlinear control of underactuated/nonholonomic mechanical systems.

A formation of n -agents together with the position and the attitude of a formation is formally defined in [4] based on the notion of graph rigidity.

Consider an n -grid as a set of n points in \mathbb{R}^m shown in Fig. 2. The column vector $q = \text{col}(q_1, \dots, q_n) \in \mathbb{R}^{mn}$ is called the *configuration* of the n -grid. Identifying an agent $i \in \mathcal{I}$ by its position q_i , an agent can be viewed as a point in \mathbb{R}^m . Assume $\|q_2 - q_1\| > 0$ and connect the agents 1 and 2 by a directed partial-line e_{12} that is called the *base-edge* of the n -grid. For any n -grid in \mathbb{R}^2 , a *body-axes* can be defined by taking e_{12} as the




Figure 2: Formation of $n \geq 2$ agents with a base edge $(1, 2)$ in \mathbb{R}^2 .

x -axis and $e_{12}^\perp = Te_{12}$ as the y -axis where for a vector $x = (x_1, x_2)^T$, $x^\perp = (-x_2, x_1)$. Let $\mathbf{n}(x) = x/\|x\|$ and for $q_i \neq q_j$ define

$$\mathbf{n}_{ij} = \mathbf{n}(q_j - q_i) = \frac{q_j - q_i}{\|q_j - q_i\|}$$

Then, $(\phi_1, \phi_2) = (\mathbf{n}_{12}, \mathbf{n}_{12}^\perp)$ defines the bases of the *body-axes*. In [4], the following $(2n - 3)$ -dimensional vector

$$\varphi = (l, x_3, y_3, x_4, y_4, \dots, x_n, y_n) \in Q := \mathbb{R}_{>0} \times \mathbb{R}^{2n-4} \quad (2)$$

is called a *formation* where $l = \|q_2 - q_1\| > 0$ and (x_i, y_i) denotes the coordinates of agent- i ($3 \leq i \leq n$) in the body-axes. Clearly, φ remains invariant under rotation and translation.

3 Rigidity and Shape Dynamics of a Graph

Let $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{W})$ be a weighted graph with the set of vertices $\mathcal{V} = \{v_1, \dots, v_n\}$ (i.e. $|\mathcal{V}| = n$ where $|\cdot|$ denotes the number of elements of the set), the set of edges \mathcal{E} , and the set of weights \mathcal{W} . In addition, define $\mathcal{I} = \{1, 2, \dots, n\}$ as the set of indices of the element of \mathcal{V} . Each agent in a multi-agent system can be viewed as a node of the graph \mathcal{G} which represents the overall system.

Remark 2. Throughout this paper, we assume that controller of the multi-agent system is *distributed*. This means that each agent performs *sensing and communication* with all of its *neighbors* $J_i := \{j \in \mathcal{I} : e_{ij} \in \mathcal{E}\}$ in a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$. As a special case, this definition of a neighbor includes the case of *spatial neighbors* of an agent that are located within a distance $d > 0$ of each agent (see [1]).

Let $q_i \in \mathbb{R}^m$ denote the coordinates vector assigned to node v_i of the graph. Then $q = (q_1, \dots, q_n)^c \in \mathbb{R}^{mn}$ is called a *realization* of \mathcal{G} iff

$$\|q_j - q_i\| = w_{ij}, \forall e_{ij} \in \mathcal{E}, q_i, q_j \in \mathbb{R}^m$$

where $\mathcal{W} = \{w_{ij}\}, \mathcal{E} = \{e_{ij}\}$. The pair (\mathcal{G}, q) is called a *framework*. An *infinitesimal motion* is an assignment

of a velocity vector p_i to the vertex v_i of the graph \mathcal{G} such that

$$\langle p_j - p_i, q_j - q_i \rangle = 0, \quad \forall e_{ij} \in \mathcal{E} \quad (3)$$

where $\langle \cdot, \cdot \rangle$ denotes the inner product. A framework (\mathcal{G}, q) is called *rigid* iff the only acceptable infinitesimal motions of the framework are due to rigid motions in \mathbb{R}^m . For further details regarding combinatorial characterization of graph rigidity in \mathbb{R}^2 , we refer the reader to [4].

Any rigid graph \mathcal{G} with $n \geq 2$ nodes and $2n - 3$ edges is called a *minimally rigid graph* (MRG) [4]. Due to computational and communications costs in a network of n -vehicles, we are interested in the least possible number of edges between the agents that creates a rigid graph and thus a locally stabilizing distributed control law for each vehicle [11]. This makes minimally rigid graphs the ideal choice for us. Moreover, MRGs benefit from some nice analytic properties that allow one to construct bigger graphs through connecting minimally rigid subgraphs [4].

The edges of a minimally rigid graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{W})$ define the following set of *shape variables* for the graph:

$$\eta_{ij} := \|q_j - q_i\| - w_{ij}, \quad \forall e_{ij} \in \mathcal{E} \quad (4)$$

We call the column vector η and manifold $Q(\mathcal{G})$ defined by

$$\eta = \{\eta_{ij}\} \in Q(\mathcal{G}) := \Pi_{e_{ij} \in \mathcal{E}}(-w_{ij}, \infty) \subset \mathbb{R}^{2n-3} \quad (5)$$

as the *shape configuration* and *shape manifold* of \mathcal{G} . Any point at the boundary of $Q(\mathcal{G})$ corresponds to a collision between two agents. The *shape velocity* of \mathcal{G} is defined as $\nu = \{\nu_{ij}\}$ with elements $\nu_{ij} = \dot{\eta}_{ij}$ given by

$$\nu_{ij} := \frac{\langle q_j - q_i, p_j - p_i \rangle}{\|q_j - q_i\|} = \langle \mathbf{n}_{ij}, p_j - p_i \rangle, \quad \forall e_{ij} \in \mathcal{E} \quad (6)$$

By definition of ν , any infinitesimal motion of the graph maintains the shape velocity at zero. The *shape dynamics* of \mathcal{G} is a set of equations in the form

$$e_{ij} : \begin{cases} \dot{\eta}_{ij} &= \nu_{ij} \\ \dot{\nu}_{ij} &= \frac{\|p_j - p_i\|^2 - \nu_{ij}^2}{\|q_j - q_i\|} + \langle \mathbf{n}_{ij}, u_j - u_i \rangle \end{cases} \quad (7)$$

where $e_{ij} = (v_i, v_j) \in \mathcal{E}$ is an edge of the graph \mathcal{G} . The overall shape dynamics of \mathcal{G} can be expressed as the following

$$\text{shape dynamics of } \mathcal{G} : \begin{cases} \dot{\eta} &= \nu \\ \dot{\nu} &= \Phi(\tilde{q}, \tilde{p}) + B(\tilde{q})\tilde{u} \end{cases} \quad (8)$$

where $\Phi(\tilde{q}, \tilde{p})$ vanishes at $\tilde{p} = 0$, $B(\tilde{q})$ is an $f \times 2f$ matrix ($f = 2n - 3$) and

$$\tilde{q} = \{(q_j - q_i)\}_{e_{ij} \in \mathcal{E}}, \tilde{p} = \{(p_j - p_i)\}_{e_{ij} \in \mathcal{E}}, \tilde{u} = \{(u_j - u_i)\}_{e_{ij} \in \mathcal{E}}$$

are column vectors of *relative positions*, *relative velocities*, and *relative controls* in \mathbb{R}^{2f} , respectively. The *structural potential function* of the graph \mathcal{G} is defined as a smooth, proper, and positive definite function $V(\eta)$ that satisfies $V(0) = 0$. Two examples of $V(\eta)$ (or $V(q)$) are given in [11] as the following:

$$\begin{aligned} V_1(\eta) &= \sum_{e_{ij} \in \mathcal{E}} \eta_{ij}^2 \\ V_2(\eta) &= \sum_{e_{ij} \in \mathcal{E}} [(1 + \eta_{ij}^2)^{\frac{1}{2}} - 1] \end{aligned} \quad (9)$$

Definition 1. (structural stabilization) By (*asymptotic structural formation stabilization*), we mean (asymptotic) stabilization of the shape dynamics of \mathcal{G} around the equilibrium point $(\eta, \nu) = 0$ such that for the closed loop system in (8), $(\eta, \nu) = 0$ is (asymptotically) stable in the sense of Lyapunov.

Remark 3. Clearly, $V_2(q) := V_2(\eta)$ has a bounded gradient w.r.t. q and this is the key in designing a bounded control input for structural formation stabilization in [11].

The following lemma shows that for a formation of $n = 2$ dynamic agents, exponential structural formation stabilization can be readily achieved.

Lemma 1. *The shape dynamics of \mathcal{G} in (8) for $n = 2$ agents satisfying $\tilde{u} = \alpha_{12} \cdot \mathbf{n}_{12}$ with a scalar control input $\alpha_{12} \in \mathbb{R}$ is fully-actuated.*

Proof. For $n = 2$, $\tilde{u} = u_2 - u_1 \in \mathbb{R}^2$. Applying the invertible change of control

$$\tilde{u} = [\gamma_{12} - \Phi(\tilde{q}, \tilde{p})]\mathbf{n}_{12}$$

where $\gamma_{12} \in \mathbb{R}$ is the new control, we get

$$\begin{cases} \dot{\eta}_{12} &= \nu_{12} \\ \dot{\nu}_{12} &= \gamma_{12} \end{cases}$$

which is a fully-actuated system with a single degree of freedom. \square

In this paper, our approach is to define and achieve structural stabilization and navigational stabilization/tracking for a formation of $n = 2$ dynamic agents. Then, we augment this formation with further agents and demonstrate a three-way *separation principle* in control design for both current and successively added agents. This process in a graph theoretical setting is called *node augmentation* and in [4] it is proved that node augmentation preserves minimal rigidity property of the obtained graph.

4 Stabilization and Tracking for $n = 2$ Agents

In this section, we demonstrate that structural stabilization, position tracking, and attitude tracking for a formation of $n = 2$ agents can be reduced to three separate stabilization problems.

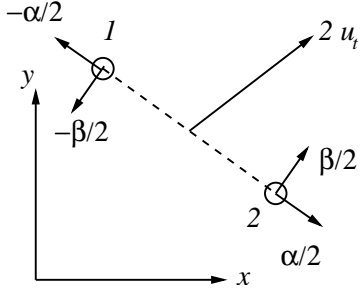


Figure 3: The control inputs applied to each agent in a two-agent formation.

Theorem 1. (*separation of structural stabilization and navigation control design*) For a formation of $n = 2$ agents, shape, rotational, and translational dynamics can be decoupled as the following:

$$\begin{aligned} \text{shape dynamics:} & \begin{cases} \dot{\eta} = \nu \\ \dot{\nu} = u_s \end{cases} \\ \text{rotational dynamics:} & \begin{cases} \dot{R} = R\hat{\omega} \\ \dot{\omega} = u_r \end{cases} \\ \text{translational dynamics:} & \begin{cases} \dot{x} = v \\ \dot{v} = u_t \end{cases} \end{aligned} \quad (10)$$

where $\eta = \|q_2 - q_1\| - w_{12}$, $R = [\mathbf{n}_{12} | \mathbf{n}_{12}^\perp]$, $x = (q_1 + q_2)/2$, $\hat{\omega} \in \mathfrak{so}(2)$, and u_1, u_2 are given by

$$\begin{aligned} u_1 &= -\frac{\alpha}{2}\mathbf{n}_{12} - \frac{\beta}{2}\mathbf{n}_{12}^\perp + u_t \\ u_2 &= +\frac{\alpha}{2}\mathbf{n}_{12} + \frac{\beta}{2}\mathbf{n}_{12}^\perp + u_t \end{aligned} \quad (11)$$

and $u_s, u_t \in \mathbb{R}$ are, respectively, obtained from $\alpha, \beta \in \mathbb{R}$ by applying an invertible change of control and $u_t \in \mathbb{R}^2$.

Proof. The forces applied to each agent are shown in Fig. 3. We have $u_1 + u_2 = 2u_t$, thus $\ddot{x} = u_t$. Moreover, since $u_2 - u_1 = \alpha\mathbf{n}_{12} + \beta\mathbf{n}_{12}^\perp$, the term $\langle u_2 - u_1, \mathbf{n}_{12} \rangle = \alpha$ does not depend on the choice of β . For the shape dynamics of the edge e_{12} , we obtain

$$\begin{aligned} \dot{\eta} &= \nu \\ \dot{\nu} &= \phi_{12} + \alpha \end{aligned} \quad (12)$$

where $\phi_{12} = \Phi(\tilde{q}, \tilde{p})$. After applying the change of control

$$\alpha = u_s - \frac{\|p_2 - p_1\|^2 - \nu^2}{\|q_2 - q_1\|}$$

one gets $\dot{\eta} = u_s$ which determines the structural dynamics of the formation. It remains to establish the connection between β and the control of the attitude dynamics u_r . For doing so, observe that

$$\hat{\omega} = \begin{bmatrix} 0 & \omega \\ -\omega & 0 \end{bmatrix}$$

and from $\dot{R} = R\hat{\omega}$, we have $\dot{\mathbf{n}}_{12} = -\omega\mathbf{n}_{12}^\perp$ and $\dot{\mathbf{n}}_{12}^\perp = \omega\mathbf{n}_{12}$. Thus, after differentiating both sides of the following equation

$$\|q_2 - q_1\|\mathbf{n}_{12} = q_2 - q_1$$

with respect to t , we get

$$\nu\mathbf{n}_{12} - \omega\|q_2 - q_1\|\mathbf{n}_{12}^\perp = p_2 - p_1$$

which means

$$\omega = -\frac{\langle p_2 - p_1, \mathbf{n}_{12}^\perp \rangle}{\|q_2 - q_1\|} \quad (13)$$

after differentiating

$$\|q_2 - q_1\|\omega = -\langle p_2 - p_1, \mathbf{n}_{12}^\perp \rangle \quad (14)$$

w.r.t. t , we obtain

$$\nu\omega + \|q_2 - q_1\|\dot{\omega} = -\langle u_2 - u_1, \mathbf{n}_{12}^\perp \rangle - \langle p_2 - p_1, \omega\mathbf{n}_{12} \rangle \quad (15)$$

Noticing that $\langle p_2 - p_1, \omega\mathbf{n}_{12} \rangle = \nu\omega$ and $\langle u_2 - u_1, \mathbf{n}_{12}^\perp \rangle = \beta$ does not depend on the choice of α (or u_t), one gets

$$u_r = \dot{\omega} = -\frac{\beta + 2\nu\omega}{\|q_2 - q_1\|} \quad (16)$$

or

$$\beta = -(\|q_2 - q_1\|u_r + 2\nu\omega) \quad (17)$$

This change of control is invertible as long as $q_1 \neq q_2$. The overall control input for agent- i ($i = 1, 2$) takes the following explicit form:

$$\begin{aligned} u_i &= \frac{(-1)^i}{2} \left(u_s - \frac{\|p_2 - p_1\|^2 - \nu^2}{\|q_2 - q_1\|} \right) \mathbf{n}_{12} \\ &+ \frac{(-1)^{i+1}}{2} (\|q_2 - q_1\|u_r + 2\nu\omega) \mathbf{n}_{12}^\perp \\ &+ u_t \end{aligned} \quad (18)$$

where the controls u_s, u_r, u_t can be determined mutually independent of each other. \square

Theorem 2. *Collision-free exponential structural stabilization and navigational tracking can be achieved for a formation of $n = 2$ dynamic agents.*

Proof. The proof relies on the fact that no collision occurs iff $\eta_{12}(t) > -w_{12}, \forall t \geq 0$. This is schematically demonstrated in Fig. 4. For further details, please see the proof of Theorem 2 and Remark 4 in [12]. \square

Remark 4. For coordinate-independent exponential attitude tracking for $SO(2)$ and $SO(3)$ matrices, we refer the reader to the important work of Bullo [13] for the kinematic equation $\dot{R} = R\hat{\omega}$ and its generalization in [14, pp. 179–184] to the dynamic case.

5 Main Result: Dynamic Node Augmentation

One possible way to view a multi-agent formation or group of vehicles with $n \geq 3$ agents is to start with a formation of $n = 2$ agents and then successively add more agents to the formation. This process is formally described in [4] and is called *node augmentation*.

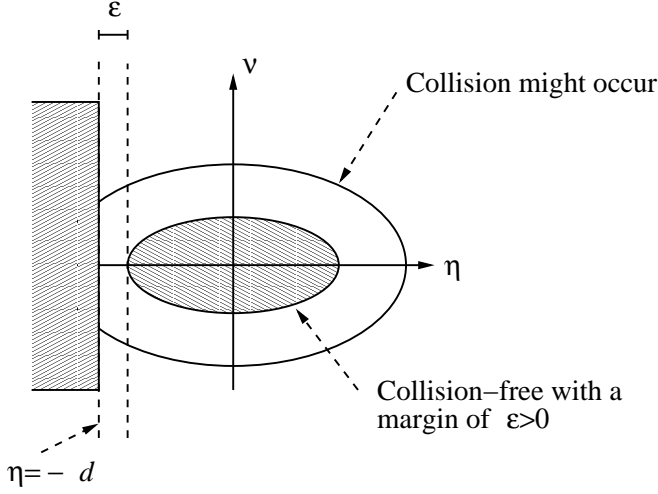


Figure 4: The collision-free region of attraction of the closed-loop shape dynamics of the formation.

Roughly speaking, each new agent, say agent- k , establishes two edges with two exiting agents, say agent- i and agent- j , in the graph representing the formation. This is shown schematically in Fig. 5. In [4], it is proved that a minimally rigid graph remains minimally rigid under node augmentation.




Figure 5: Augmentation of the node k at the edge (i, j) of a multi-node graph representing a multi-agent formation.

Two examples of graphs created using node-augmentation are shown in Fig. 6. Here is a sequence of nodes and edges that create a (minimally) rigid graph shown in Fig. 6 (a), (b).

$$\begin{aligned} \mathcal{G}_a : & 1; 2, (2, 1); 3, (3, 1), (3, 2); 4, (4, 2), (4, 3). \\ \mathcal{G}_b : & 1; 2, (2, 1); 3, (3, 1), (3, 2); 4, (4, 2), (4, 3); \\ & 5, (5, 3), (5, 4); 6, (6, 4), (6, 5); 7, (7, 5), (7, 6). \end{aligned} \quad (19)$$

In this section, we describe the process of control design for the augmented agent, called agent- k , to achieve structural stabilization of the obtained formation with the use of control inputs of agent- i and agent- j . The edge dynamics associated with the augmented edges

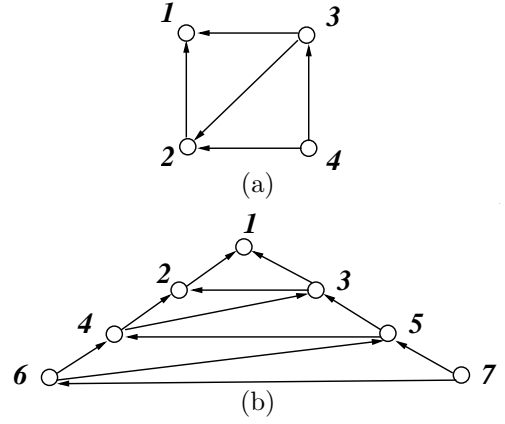


Figure 6: (a) A rigid graph \mathcal{G}_a with $n = 4$ nodes and $n_e = 5$ edges representing a diamond formation and (b) A rigid graph \mathcal{G}_b representing a V-formation of $n = 7$ vehicles with $n_e = 11$ edges.

e_{ki} and e_{kj} can be expressed as follows:

$$e_{ki} : \begin{cases} \dot{\eta}_{ki} = \nu_{ki} \\ \dot{\nu}_{ki} = \phi_{ki} + \langle \mathbf{n}_{ki}, u_i - u_k \rangle \end{cases} \quad (20)$$

$$e_{kj} : \begin{cases} \dot{\eta}_{kj} = \nu_{kj} \\ \dot{\nu}_{kj} = \phi_{kj} + \langle \mathbf{n}_{kj}, u_j - u_k \rangle \end{cases}$$

where

$$\phi_{ab} = \frac{\|p_b - p_a\|^2 - \nu_{ab}^2}{\|q_b - q_a\|} \quad (21)$$

for all indices $a, b \in \{i, j, k\}$, $a \neq b$.

Assumption 1. Suppose that dynamic agent- k is not collinear with agent- i and agent- j for all time, i.e. $\rho(t) = 1 - \langle \mathbf{n}_{ki}(t), \mathbf{n}_{kj}(t) \rangle^2 > 0, \forall t \geq 0$. In addition, assume agent- k applies a control input in the following form:

$$u_k = \gamma_i \mathbf{n}_{ki} + \gamma_j \mathbf{n}_{kj} \quad (22)$$

where $\gamma_i, \gamma_j \in \mathbb{R}$ are new controls for agent- k .

Define the following quantities:

$$\begin{aligned} \lambda_i &= \phi_{ki} + \langle \mathbf{n}_{ki}, u_i \rangle \\ \lambda_j &= \phi_{kj} + \langle \mathbf{n}_{kj}, u_j \rangle \end{aligned} \quad (23)$$

Under Assumption 1, we obtain the following dynamics for the augmented edges:

$$e_{ki} : \begin{cases} \dot{\eta}_{ki} = \nu_{ki} \\ \dot{\nu}_{ki} = \lambda_i - \gamma_i - \langle \mathbf{n}_{ki}, \mathbf{n}_{kj} \rangle \gamma_j \end{cases} \quad (24)$$

$$e_{kj} : \begin{cases} \dot{\eta}_{kj} = \nu_{kj} \\ \dot{\nu}_{kj} = \lambda_j - \langle \mathbf{n}_{kj}, \mathbf{n}_{ki} \rangle \gamma_i - \gamma_j \end{cases}$$

Defining $\eta = (\eta_{ki}, \eta_{kj})^T$, $\nu = (\nu_{ki}, \nu_{kj})^T$, $\lambda = (\lambda_i, \lambda_j)^T$, $\gamma = (\gamma_i, \gamma_j)^T$, and

$$S = \begin{bmatrix} 1 & \langle \mathbf{n}_{ki}, \mathbf{n}_{kj} \rangle \\ \langle \mathbf{n}_{ki}, \mathbf{n}_{kj} \rangle & 1 \end{bmatrix} \quad (25)$$

The shape dynamics associated with the augmented edges in (24) can be rewritten as

$$\begin{aligned}\dot{\eta} &= \nu \\ \dot{\nu} &= \lambda - S \cdot \gamma\end{aligned}\quad (26)$$

where $\eta, \nu, \lambda, \gamma \in \mathbb{R}^2$ and $S = S^T$ is an invertible matrix. The invertibility of S follows from Assumption 1 and the fact that $\det(S) = 1 - \langle \mathbf{n}_{ki}, \mathbf{n}_{kj} \rangle^2 > 0$ for three non-collinear agents i, j , and k .

Theorem 3. (*dynamic node augmentation*) Suppose each agent in a group of n dynamic agents applies a control input that guarantees structural stabilization of a desired formation φ_d with an associated minimally rigid graph \mathcal{G} . Let agent- k be a new agent that is augmented to the existing group of agents (represented by \mathcal{G}) by two new edges and call the augmented graph \mathcal{G}_a . Suppose agent- k satisfies Assumption 1, then applying the distributed control law $u_k = \gamma_i \mathbf{n}_{ki} + \gamma_j \mathbf{n}_{kj}$ by agent- k with

$$\begin{bmatrix} \gamma_i \\ \gamma_j \end{bmatrix} = S^{-1}(c_p \eta + c_d \nu + \lambda), \quad c_p, c_d > 0 \quad (27)$$

achieves structural stabilization of the shape dynamics of the augmented graph \mathcal{G}_a .

Proof. The closed-loop shape dynamics of the augmented edges takes the form:

$$\begin{aligned}\dot{\eta} &= \nu \\ \dot{\nu} &= -c_p \eta - c_d \nu\end{aligned}\quad (28)$$

and therefore $(\eta, \nu) = 0$ is (locally) exponentially stable. A collision-free region of attraction Ω for the shape dynamics of the augmented edges can be obtained in a similar way that is discussed in the proof of Theorem 2. \square

For a general formation of n -agents with $n \geq 3$ that can be constructed using successive node augmentations satisfying the non-collinearity condition in Assumption 1, the *dynamic node augmentation procedure* can be summarized as follows. The first two agents are used to solve structural stabilization and navigational tracking problems for a formation of $n = 2$ agents. Then, each new agent solves the structural stabilization for the shape dynamics of the augmented edges. This procedure leads to a distributed control law with a sensing and communication pattern shown in Fig 7. Here, the source might or might not be an agent and it plays the role of a *task command center* for the formation of the vehicles. Apparently, the sensing pattern (flow) required to implement the controllers obtained using dynamic node augmentation procedure is uni-direction.

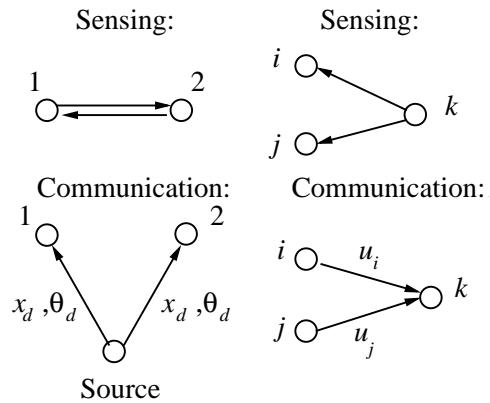


Figure 7: The information flow in dynamic node augmentation in terms of inter-agent directions of sensing and communication.

6 Simulation Results

The simulation results for construction of a diamond formation using two successive node augmentation to an initial formation of 2 agents are shown in Fig. 8 (a),(b). The initial condition is chosen to be

$$x_0 = \begin{bmatrix} -20 & 10 & 10 & -10 \\ -3 & 2 & -10 & -30 \\ 0 & 1 & 0 & 1 \\ -2 & -3 & 0 & -1 \end{bmatrix} \quad (29)$$

where the i th column of x_0 denotes $\text{col}(q_i(0), p_i(0)) \in \mathbb{R}^4$, i.e. the position and velocity of agent- i . The formation of these four agents exponentially (in terms of shape configuration and velocity) converges to a diamond formation with an edge length $d = 10$. From Fig. 8 (b), it is clear that in less than $T = 5$ seconds the trajectories of each agent converges.

7 Conclusion

In this paper, we provided a theoretical framework that is a mix of graph theoretical and Lyapunov-based approaches to stability analysis and distributed formation control for dynamic multi-agent systems. The notion of graph rigidity and minimally rigid graph turned out to be crucial in identifying the shape variables of a formation. Graph rigidity allowed us to formally define formations of multiple dynamic agents and three types of stabilization/tracking problems for multi-agent systems. We stated a separation principle that allows addressing structural stability and navigational tracking problems independently for a formation of two agents. Then, we introduced a procedure called dynamic node augmentation that allowed construction of a larger formation with more agents that can be rendered structurally stable in a distributed manner given that the

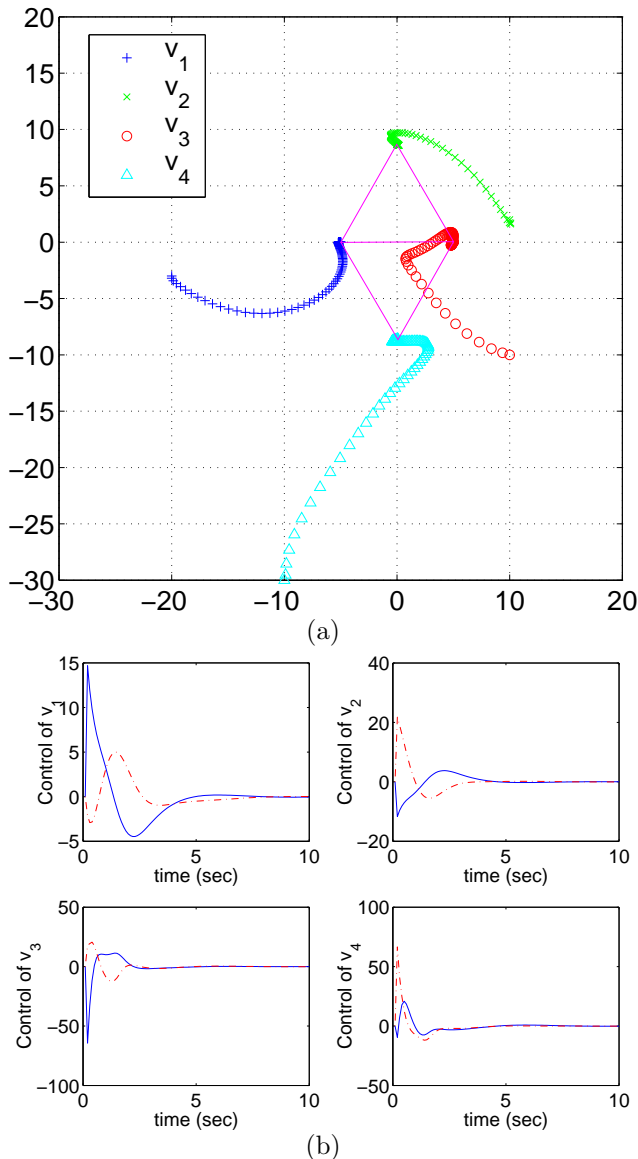


Figure 8: (a) a diamond formation of four agents, (b) the control inputs applied by each agent.

initial formation is structurally stable. We provided two examples of formations that can be controlled in a distributed fashion using this approach. Namely, the diamond formation and the V-formation. One of the main advantages of this framework is that it can be directly generalized to formation control in \mathbb{R}^3 . Moreover, the sensing performed by each agent in dynamic node augmentation is uni-directional as supposed to bi-directional sensing as a result of using potential functions.

References

[1] N. E. Leonard and E. Fiorelli, “Virtual leaders, artificial potentials, and coordinated control of groups,” *Proc. of the 40th IEEE Conference on De-*

cision and Control, Orlando, FL, Dec. 2001.

[2] B. Hendrickson, “The molecule problem: exploring structure in global optimization,” *SIAM J. Optimization*, vol. 5, no. 4, pp. 835–857, November 1995.

[3] A. Fax and R. M. Murray, “Information Flow and Cooperative Control of Vehicle Formations,” *The 15th IFAC World Congress*, June 2002.

[4] R. Olfati-Saber and R. M. Murray, “Graph Rigidity and Distributed Formation Stabilization of Multi-Vehicle Systems,” *Proceedings of the IEEE Int. Conference on Decision and Control*, Dec. 2002.

[5] G. Laman, “On graphs and rigidity of plane skeletal structures,” *Journal of Engineering Mathematics*, vol. 4, no. 4, pp. 331–340, October 1970.

[6] H. Gluck, “Almost all simply connected closed surfaces are rigid,” in *Geometric Topology*, number 438 in Lecture Notes In Mathematics, pp. 225–239. Springer-Verlag, Berlin, 1975.

[7] B. Roth, “Rigidity and flexible frameworks,” *The American Mathematical Monthly*, vol. 88, pp. 6–21, January 1982.

[8] L. Lovász and Y. Yemini, “On generic rigidity in the plane,” *SIAM J. Alg. Disc. Meth.*, vol. 3, no. 1, pp. 91–98, March 1982.

[9] J. Graver and H. Servatius, B. Servatius, *Combinatorial Rigidity*, vol. 2 of *Graduate Studies in Mathematics*, American Mathematical Society, 1993.

[10] M. Laurent, “Cuts, matrix completions, and graph rigidity,” *Mathematical Programming*, pp. 255–283, 1997.

[11] R. Olfati-Saber and R. M. Murray, “Distributed cooperative control of multiple vehicle formations using structural potential functions,” *The 15th IFAC World Congress*, June 2002, http://www.cds.caltech.edu/~murray/papers/20011_om02-ifac.html.

[12] R. Olfati-Saber and R. M. Murray, “Distributed structural stabilization and tracking for formations of dynamic multi-agents,” Tech. Rep. CIT-CDS 2002-002, California Institute of Technology, Control and Dynamical Systems, Pasadena, California, February 2002.

[13] F. Bullo, *Nonlinear Control of Mechanical Systems: A Riemannian Geometry Approach*, Ph.D. thesis, California Institute of Technology, Department of Control and dynamical Systems, 1998.

[14] R. Olfati-Saber, *Nonlinear Control of Underactuated Mechanical Systems with Application to Robotics and Aerospace Vehicles*, Ph.D. thesis, Massachusetts Institute of Technology, Department of Electrical Engineering and Computer Science, February 2001, <http://www.cds.caltech.edu/~olfati>.